
INNO3D 4U Rackmount - NVIDIA® MGX®

Model#: 250-0K227-000QC
SKU: ZRS-MGX-AT1-GN
EAN: 888630770561-7

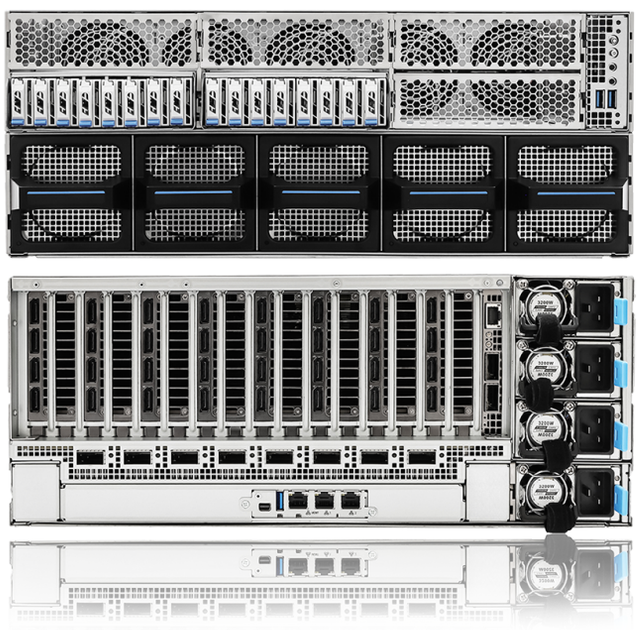

INNO3D NVIDIA MGX™ 4U GPU SERVER WITH NVIDIA CONNECTX® 8 SUPERNIC™

4U MGX 8GPU CX8 (Barebone Server)

FEATURES

- **Intel® Xeon® 6700P-Series, 6500P-Series, 6700E-Series Processors Up to 350W**
- **32GB, 64GB, 96GB, 128GB (RDIMM) / 256GB (RDIMM 3DS)**
- **1 x M-key (PCIe Gen5 x 4), supports 2280 form factor [CPU0]**
  1 x M-key (PCIe Gen5 x 2), support 2280 from factor [CPU0]
- **16 x Hot-swap E1.S (PCIe Gen5 x 4) drive bays, 9.5mm / 15mm width**
- **NVIDIA RTX PRO 6000BSE / RTX PRO 4500BSE supported (up to 8 cards) - (GPU Card is not included)**

CONTENTS

- 1 x AGS-4UMGXR1-B00 4U MGX Rackmount Barebone System
- 2 x CPU heatsinks
- 8 x GPU Brackets
- 1 GPU Bracket Screw kit
- 4 x CPU Non-fabric Carriers (2 x E2A, 2 x E2B)
- 1 x L-shape Rail Kit
- 4 x CRPS Power Supply (Pre-installed)
- 4 x Power cords
- 1 x Cable Tie
- 2 x Screws for M.2 Sockets

INNO3D®

Model#: 250-0K227-000QC
SKU: ZRS-MGX-AT1-GN
EAN: 888630770561-7

MODEL NAME	4U MGX 8GPU CX8 - Barebone Server
FORM FACTOR	4U Rackmount - NVIDIA® MGX®
CPU	Intel® Xeon® 6700P-Series, 6500P-Series, 6700E-Series Processors Up to 350W
SOCKET	2 x LGA4710 (Socket E2)
MEMORY SUPPORT	8-channel (2DPC) DDR5 RDIMM / MRDIMM per CPU DDR5 6400 - 1DPC / DDR5 5200 - 2DPC - RDIMM/3DS RDIMM 16+16 DIMM Slots (2DPC)
MEMORY CAPACITY	Maximum up to 4TB
MEMORY MODULE	32GB, 64GB, 96GB, 128GB (RDIMM) / 256GB (RDIMM 3DS)
LAN	Intel® i350: 2x RJ45 -1GbE 1 x Realtek RTL8211F 1GbE management port (BMC)
OTHER NETWORK	8 x QSFP112 (400Gb/s) ports via NVIDIA® ConnectX® -8 SuperNIC
BMC	Integrated Aspeed® AST2600: IPMI 2.0 with iKVM and vMedia support 1920x1200@60Hz, DDR4 512MB
STORAGE (Internal)	1 x M-key (PCIe Gen5 x 4), supports 2280 form factor [CPU0] 1 x M-key (PCIe Gen5 x 2), support 2280 from factor [CPU0]
STORAGE (Front side Drive Bay)	16 x Hot-swap E1.S (PCIe Gen5 x 4) drive bays, 9.5mm / 15mm width
EXPANSION SLOTS	8 x PCIe Gen 5 x 16 Slot - (Full Height Full Length Dual Slot) 1 x PCIe Gen 5 x 16 Slot - (Full Height Half Length)
PCIE SWITCH	NVIDIA® ConnectX® 8 SuperNIC as a PCIe Gen 6 Switch
Multi-GPU support	NVIDIA RTX PRO 6000BSE / RTX PRO 4500BSE supported (up to 8 cards) - (GPU Card is not included)
Optional Network	NVIDIA® Bluefield 3 SuperNIC (Optional)
FRONT Panel	1 x Power Button with LED 1 x Reset Button 1 x NMI Button 1 x UID Button with LED 1 x System Fault LED, 1 x HDD activity LED, LAN1/LAN2 activity LED 2 x Type A USB 3.2 Gen 1 ports
Rear Panel	4 x Redundant 3200W CRPS 80 Plus Titanium PSU (3+1 CRPS) 8 x QSFP112 (400Gb/s) ports via NVIDIA® ConnectX®-8 1 x Mini-DisplayPort 1 x Type-A USB 3.2 Gen1 port 1 x Power Button 1 x Dedicated IPMI GigaLAN port 1 x UID Button 2 x GbE RJ45 LAN port - Intel i350 (LAN 1 & 2) 1 x System fault LED
TPM	On-board TPM 2.0 Hardware Root of Trust - Microchip CEC1736
POWER SUPPLY	4 x Redundant 3200W @ 200-240Vac input / 1200W @ 100-127Vac input CRPS 80 Plus Titanium PSU (3+1 CRPS)
COOLING / SYSTEM FANS	Air Cool: 5 x Hot-swap 80 x 80 mm Fan - Air cooling (Upper Front) 5 x Hot-swap 80 x 80 mm Fan - Air cooling (Lower Front)
OPERATING PROPERTIES	Operating temperature: 10°C to 30°C Operating humidity: 20-80% (non-condensing) Non-operating temperature: -40°C to 70°C Non-operating humidity: 20%-90% (non-condensing)
CONTENTS	1 x AGS-4UMGXR1-B00 4U MGX Rackmount Barebone System 2 x CPU heatsinks 8 x GPU Brackets 1 GPU Bracket Screw kit 4 x CPU Non-fabric Carriers (2 x E2A, 2 x E2B) 1 x L-shape Rail Kit 4 x CRPS Power Supply (Pre-installed) 4 x Power cords 1 x Cable Tie 2 x Screws for M.2 Sockets
PRODUCT DIMENSIONS	85.8cm (Depth) x 44cm (Width) x 17.5cm (Height)

DISCLAIMER

The information presented in this document is for informational purposes only and may contain technical inaccuracies, omissions and typographical errors. The information contained herein is subject to change and may be rendered inaccurate for many reasons, including but not limited to product and specification changes, component and motherboard version changes, new model and/or product releases, product difference between differing manufacturers, software changes, BIOS flashes, firmware upgrades, or this like. InnoVISION assumes no obligation to update or otherwise correct or revise this information. However, InnoVISION reserves the rights to revise this information and to make changes from time to time to the content hereof without obligation of InnoVISION to notify any person of such revision or changes.
InnoVISION makes no representations or warranties with respect to the contents hereof and assumes no responsibility for any inaccuracies, errors or omissions that may appear in this information.

Copyright Notice

© Copyright, InnoVISION Multimedia Limited. All rights reserved. The INNO3D®, INNO3D Brutal by Nature Logo, are the registered and/or trademarks of InnoVISION Multimedia Limited in Asia, Europe and / or other countries. NVIDIA®, NVIDIA logo are registered and/or trademarks of NVIDIA Corporation in the United States and other countries. All other trademarks and registered trademarks are the property of their respective owners.